

IRRIGATION HEAD PER PLAN
 -SET HEAD SPECIFIED DEPTH OF MULCH PLUS 1"
 ABOVE FINISH GRADE IN LANDSCAPE BED
 AREAS, AT FINISH GRADE IN TURF AREAS

CHIP OR CUT OUT ACP AS
 NECESSARY FOR HEAD PLACEMENT

FINISH GRADE

PLANTER SOIL MIX
 PER SPECIFICATIONS

HEAD AND SWING
 ARM ASSEMBLY

SCH 40 PVC LATERAL LINE PIPE,
 SIZE PER PLAN
 -18" MIN. DEPTH FROM TOP OF
 PIPE TO FINISHED GRADE

SCH 40 PVC MAINLINE PIPE,
 SIZE PER PLAN
 -24" MIN. DEPTH FROM TOP OF
 PIPE TO FINISHED GRADE

3" MIN. SEPERATION, TYP.

4", TYP.


ROADWAY SUPPORTED CEMENT
 CONCRETE TRAFFIC CURB
 AND GUTTER PER COB
 TRANSPORTATION STANDARDS

TOP OF HMA
 ROADWAY, TYP.

ACP UNDERLAY PER
 SPECIFICATIONS

COMPACTED CSTC

COMPACTED SUBGRADE, TYP.

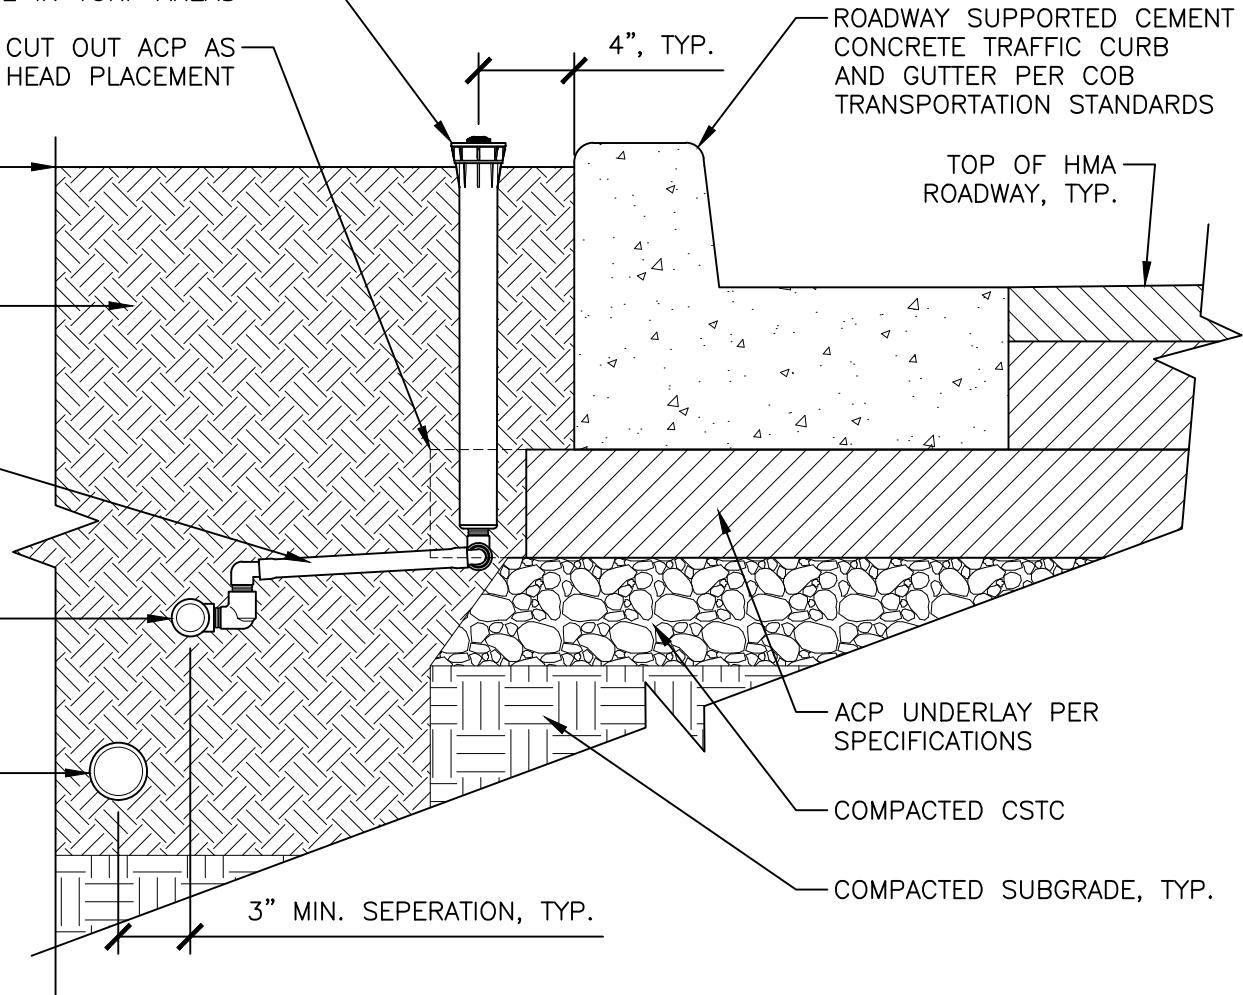

City of
 Bellevue

TITLE:

IRRIGATION - HEAD & SWING ARM ASSEMBLY - SPRAY -
 FLEX TUBING - AT ACP SUPPORTED CURB - SECTION

DRAWING #:	PK-IR-10E
SCALE:	N.T.S.
REVISION DATE:	12-2018
DEPARTMENT:	PARKS